

# ADC EcoDry ES-3131

## 30-lb x 2 Capacity Coin Stack Dryer

### Standard Features:

- 30-lb. x 2 Capacity
- Self-Diagnostic Microprocessor Control
- 100% Axial Airflow
- Completely Sealed Basket
- Non-Perforated Ribs and Basket
- Dual-Paned Door Glass
- Four-Point Roller Support System

### Optional Features:

- Stainless Steel Front, Cabinet & Basket
- Single Phase Reversing
- Residual Moisture Control (Coin RMC)
- S.A.F.E. (Sensor Activated Fire Extinguishing System)

COIN



ES-3131 Coin Stack Dryer

### Why Purchase ADC EcoDry?

#### 100% Axial Airflow (standard)

EcoDry tumblers incorporate a 100% axial airflow design with a completely sealed basket. This ensures the most efficient drying available on the market today without sacrificing dry times.

#### Four-Point Roller Support System (standard)

EcoDryers are designed with a four-point roller support system, eliminating costly repairs and downtime due to trunnion failures.

#### Available Option: Single Phase Reversing

Single Phase Reversing is an optional feature on the ES-3131. What once was an expensive option requiring an upgrade from single phase to three phase electrical service is now available in single phase. A reversing tumbler ensures that the load doesn't "rope" or "ball up", providing a quicker, more even drying process.

#### Available Option: Residual Moisture Control

EcoDry utilizes a unique Residual Moisture Control (Coin RMC) sensing system to measure the presence of moisture in the load. The patented system will save the coin laundry owner utility costs as it senses when the load is dry even if there is time left on the coin meter. Coin RMC reduces the heat input while it continues to run the tumbler and provides the end-user with dry, warm clothes. Coin RMC ensures full revenue for the laundry owner while at the same time reducing utility costs.

Your local ADC independent authorized distributor




[www.amdry.com](http://www.amdry.com)

# ADC EcoDry ES-3131

ES-3131 Specifications																					
Tumbler Capacity (dry weight per pocket)	30 lbs. (13.61 kg) x 2																				
Tumbler Diameter	30" (76.20 cm)																				
Tumbler Depth	27" (68.58 cm)																				
Tumbler Volume per pocket	11.04 cu ft (312.62 L)																				
Tumbler/Drive Motor per pocket	1/4 hp (0.19 kW)																				
Blower/Fan Motor per pocket	1/2 hp (0.37 kW)																				
Door Opening (Diameter)	19-3/8" (49.21 cm)																				
Door Sill Height top pocket / bottom pocket	54-11/16" (138.91 cm) 14-7/8" (37.78 cm)																				
S.A.F.E. Water Connection	North America 3/4"-11.5 NH Outside North America 3/4" B.S.P.T.																				
Dryers per 20'/40' Container	12 / 28																				
Dryers per 48'/53' Truck	34 / 38																				
Width	31-1/8" (79.06 cm)																				
Depth	gas 34-15/32" (87.52 cm) electric 34-15/32" (87.52 cm) steam 36-27/32" (93.58 cm)																				
Height	80-3/8" (204.13 cm)																				
Airflow per pocket	60 Hz 360 cfm (10.19 cmm) 50 Hz 300 cfm (8.49 cmm)																				
Exhaust Connection	6" (15.24 cm)																				
GAS MODEL:	Approx. Net Wt. 550 lbs (249.48 kg) Approx. Ship Wt. 580 lbs (263.08 kg) Heat Input 55,000 btu/hr (13,860 kcal/hr) Inlet Pipe Connection per pocket 1/2" M.N.P.T. (CE and Australia Only) 3/8" M.B.S.P.T.																				
ELECTRICAL MODEL:	Approx. Net Wt. 550 lbs (249.48 kg) Approx. Ship Wt. 580 lbs (263.08 kg) Exhaust Connection (Diameter) per pocket 6" (15.24 cm)																				
<table border="1"> <thead> <tr> <th colspan="2">Oven Size per pocket</th> <th colspan="2">Oven Size per pocket</th> </tr> <tr> <th>kW</th> <th>Btu/hr (kcal/hr)</th> <th>kW</th> <th>Btu/hr (kcal/hr)</th> </tr> </thead> <tbody> <tr> <td>7.9</td> <td>26,962 (6,794)</td> <td>11.3</td> <td>38,566 (9,719)</td> </tr> <tr> <td>8.3</td> <td>28,327 (7,138)</td> <td>12.4</td> <td>42,320 (10,665)</td> </tr> <tr> <td>9.0</td> <td>30,716 (7,740)</td> <td>12.5</td> <td>42,661 (10,751)</td> </tr> </tbody> </table>		Oven Size per pocket		Oven Size per pocket		kW	Btu/hr (kcal/hr)	kW	Btu/hr (kcal/hr)	7.9	26,962 (6,794)	11.3	38,566 (9,719)	8.3	28,327 (7,138)	12.4	42,320 (10,665)	9.0	30,716 (7,740)	12.5	42,661 (10,751)
Oven Size per pocket		Oven Size per pocket																			
kW	Btu/hr (kcal/hr)	kW	Btu/hr (kcal/hr)																		
7.9	26,962 (6,794)	11.3	38,566 (9,719)																		
8.3	28,327 (7,138)	12.4	42,320 (10,665)																		
9.0	30,716 (7,740)	12.5	42,661 (10,751)																		
STEAM MODEL:	Approx. Net Wt. 580 lbs (263.08 kg) Approx. Ship Wt. 610 lbs (276.69 kg) Steam Consumption per pocket 63 lb/hr (28.58 kg/hr) Operating Steam Pressure 150 psi max (10.34 bar) Exhaust Connection (Diameter) per pocket 6" (15.24 cm) Boiler Horsepower (Normal Load) per pocket 1.75 Bhp Supply Connection per pocket 1/2" F.N.P.T. Return Connection per pocket 1/2" M.N.P.T.																				

\* Specifications in parentheses are metric equivalents.

9/30/05

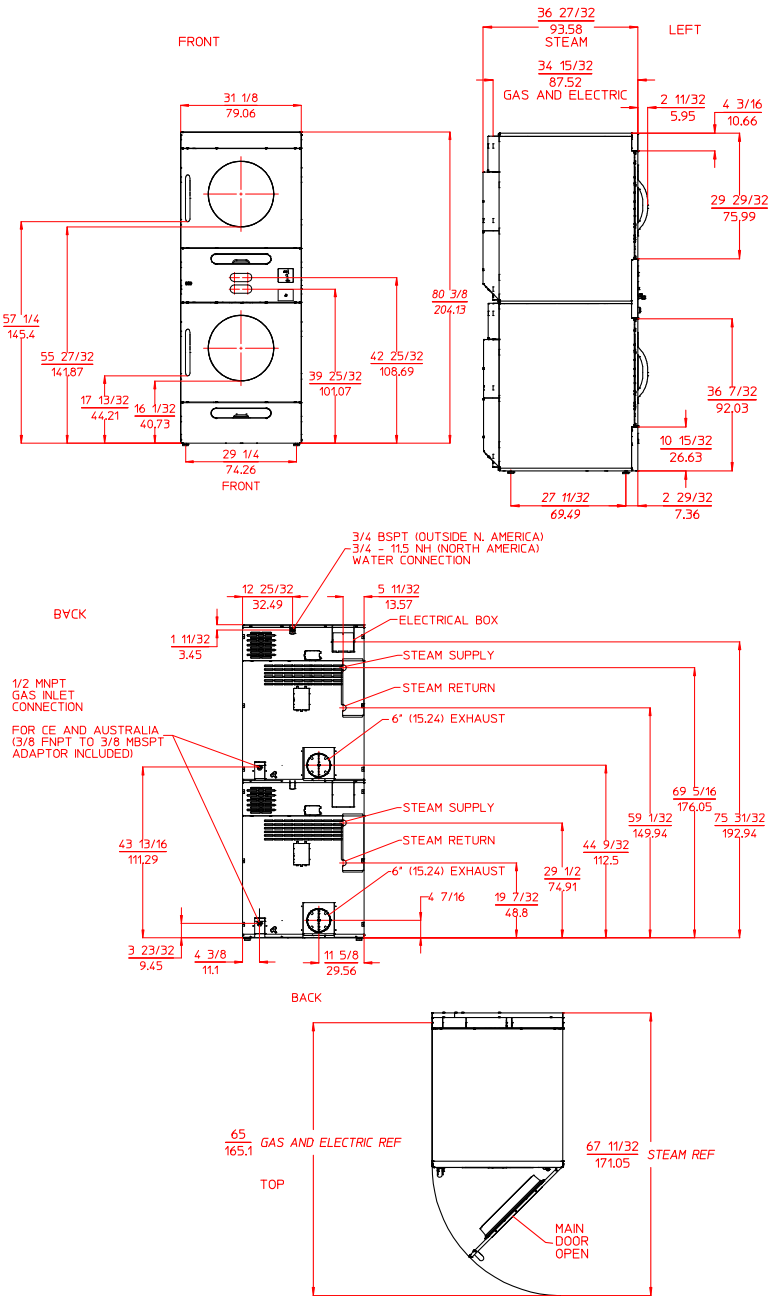

Electrical Service Specifications					
SERVICE VOLTAGE	PHASE	WIRE SERVICE	APPROX AMP DRAW		CIRCUIT BREAKER
			60 Hz	50 Hz	
<b>GAS</b>					
120	1ø	2	10.3	--	15
200	1ø	2	8.7	8.8	15
208	1ø	2	8.4	--	15
220	1ø	2	8.1	8.1	15
230	1ø	2	--	7.4	15
240	1ø	2	7.7	7.0	15
<b>STEAM</b>					
120	1ø	2	9.3	--	15
208	1ø	2	6.2	6.0	15
220	1ø	2	5.6	5.5	15
230	1ø	2	--	5.4	15
240	1ø	2	5.1	--	15

Electrical Service Specifications						
SERVICE VOLTAGE	PHASE	WIRE SERVICE	OVEN kW	APPROX AMP DRAW		CIRCUIT BREAKER
				60 Hz	50 Hz	
<b>ELECTRIC</b>						
200	1ø	2	12.5	68.4	67.7	90
208	1ø	2	7.9	43.8	--	60
208	1ø	2	13.5	70.7	--	90
230	1ø	2	8.3	--	41.3	60
230	1ø	2	12.4	--	59.1	80
240	1ø	2	9.0	42.7	--	60
240	1ø	2	13.5	61.5	--	80
208	3ø	3	13.5	43.3	--	60
220	3ø	3	11.3	35.3	--	50
230	3ø	3	12.4	--	36.5	50
240	3ø	3	13.5	37.7	--	50
380	3ø	4	11.3	22.8	22.6	40
400	3ø	4	12.4	--	23.1	40
416	3ø	4	13.5	--	23.7	40



88 Currant Road Fall River, MA 02720-4781 • 508.678.9000 • Fax: 508.678.9447 • Email: sales@amdry.com

Web Document Only

www.amdry.com